


TYPICAL SECTION WITH GEOGRID STABILIZATION
OF PERIMETER ROAD IN SUBSTATION

NOT TO SCALE

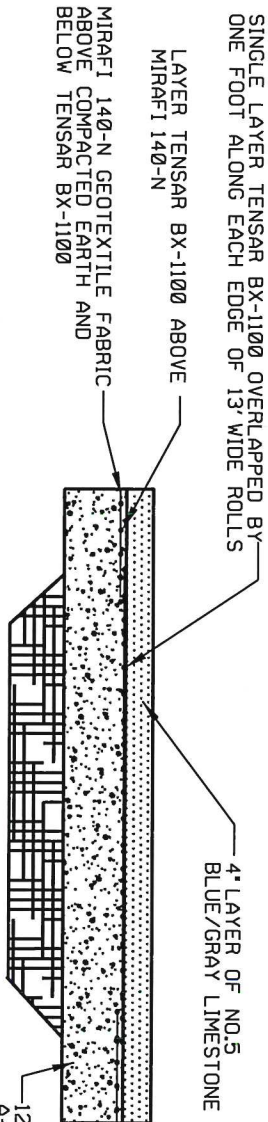

12 INCH LAYER TO CONTAIN A WELL DRAINING A-3 SAND CONTAINING LESS THAN 5% FINES. COMPACTED TO 98% OF THE MAXIMUM DENSITY AS DETERMINED BY ASTM D-1557 AND A MINIMUM LIME/ROCK BEARING RATIO (LBR) OF 40.

TYPICAL SECTION
GEOGRID AND GEOTEXTILE ROCK AREAS

N.T.S.