



Headquarters - Procurement Department
225 North Pearl Street
Jacksonville, Florida 32202

June 23, 2026

ADDENDUM NUMBER: Two (2)

TITLE: Replace Continuous Ship Unloader (CSU) Spiral Chute at Northside Generating Station (NGS)

JEA SOLICITATION NUMBER: 1412175449

BID DUE DATE: June 30, 2026

TIME OF RECEIPT: 12:00 PM

TIME OF OPENING: 02:00 PM

THIS ADDENDUM IS FOR THE PURPOSE OF MAKING THE FOLLOWING CHANGES OR CLARIFICATIONS:

Additions: The two documents listed below are attached as part of this addendum.

- 1412175449 Addendum 2 Appendix A – Drawings
- 1412175449 Addendum 2 Appendix A – Optional Proposed Plan

Clarifications:

1. The expectation of JEA in bidding the fabrication and installation in one Solicitation is that the awardees will work as a unified team. The lead company (fabricator or contractor) will coordinate with JEA and ensure the fabrication process supports a safe and successful installation.
2. In section 2.5 the original technical specifications stated:

Liner plates are to be fabricated from the same through hardened, wear resistant, steel as the segment plates or at a minimum AR400.

JEA is amending this technical specification to:


Liner plates are to be fabricated from the same through hardened, wear resistant, steel as the segment plates or at a minimum AR400F (formable).

3. JEA is not interested in the stainless-steel material for the wear plates as proposed in the 7/17/2026 meeting.

Questions:

1. **Question:** Do you have contact information for the crane company that was used in 2014?

Answer: See email chain below

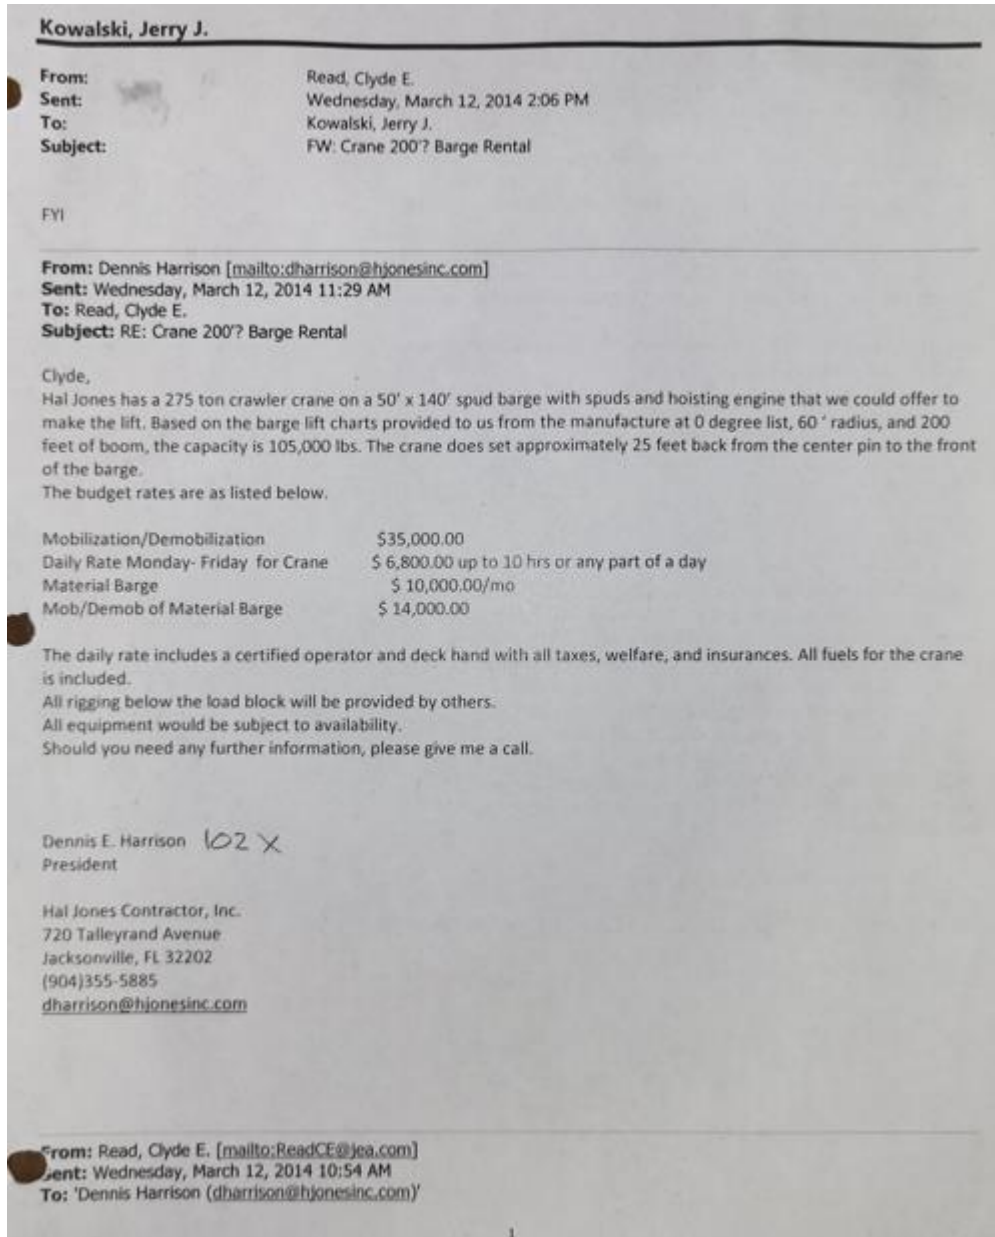

Cc: Kowalski, Jerry J.

Subject: Crane 200? Barge Rental

Dennis I talked to you yesterday and the dimensions are 35' from center line of the ship unloader, so I would use 40' as a good number for the crane that would be needed.

Need estimate for Mob & Demobilization for the crane with 200 feet of stick capable of picking 50-60 ton and then the rate per day. Also include any other items that are needed for the crane to be there for 4-6 weeks.

We also discussed a barge for use to haul equipment that is manufactured to the site that would be sitting prior to the crane actually being set up. This would be needed sometime in Sept, around the 1st week, I would need a mob and demob and daily, weekly, monthly rental just to get an idea of the amount of money that would be needed.

Any questions, please call cell phone. I understand that this pricing will not be used as a price guarantee, it'll only be used for estimating purposes.

Thank You,

Clyde Read
Construction Management
readc@jex.com
Office: 904.665.8865
Cell : 904.759.6724