



Procurement Department Bid Section
Customer Center 1st Floor, Room 002
21 W. Church Street
Jacksonville, Florida 32202

July 22, 2021

ADDENDUM NUMBER: ONE (1)

TITLE: 1410365046 (RFQ) NGS BIEB Unit 2 UPS Replacement


QUOTE DUE DATE: July 30, 2021

TIME OF RECEIPT: 11:59 PM EST

THIS ADDENDUM IS FOR THE PURPOSE OF MAKING THE FOLLOWING CHANGES OR CLARIFICATIONS:

1. Addition: JEA adds the below to Section 1.1 Materials Supplied & Work Done by Electrical Contractor of "1410365046 Appendix A - Technical Specifications" document.

- 1) Swap the 100A and 225A breakers in the bottom of the #2 AC panel (N02-EB26-702).
- 2) Remove the old cabinets with the battery charger, inverter and remote/by-pass switch from the BIEB and deliver to JEA's Westside Service Center.
- 3) Install conduit from two existing duplex receptacles and re-power existing quadplex receptacle circuits with plant UPS instead of local UPS (two circuits – roughly 5' of 3/4" conduit per circuit with # 12 wire).
- 4) Label each quadplex and duplex receptacle as per which circuit they are fed by. Will require voltage meter and communication during LOTO. JEA Engineer to assist.

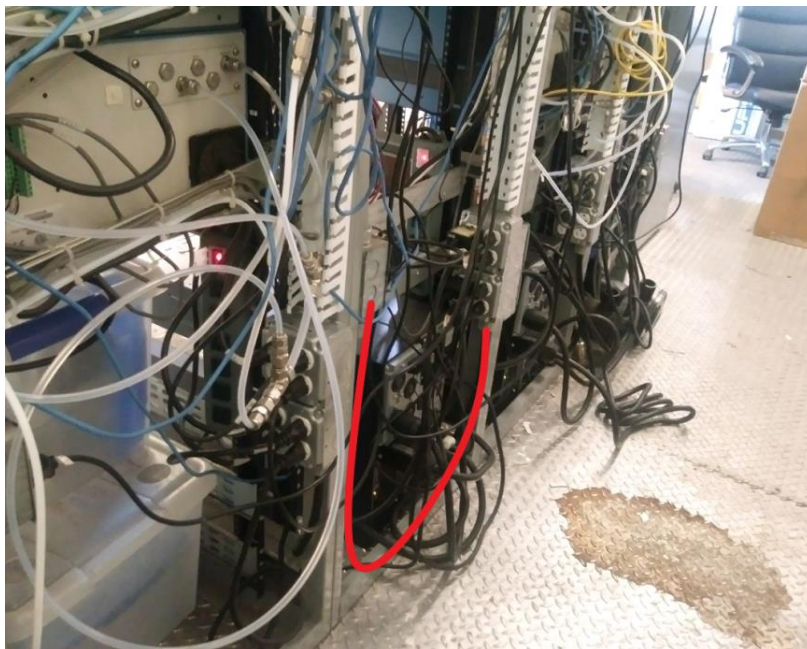

ACKNOWLEDGE RECEIPT OF THIS ADDENDUM ON THE PROPOSAL FORM.