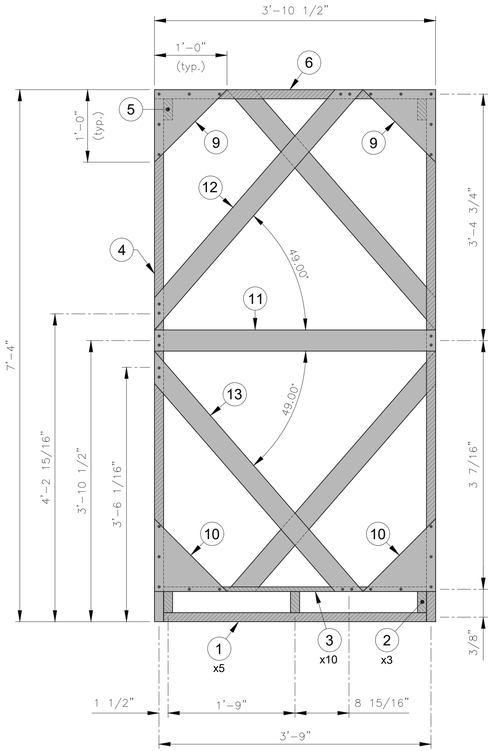

END VIEW

1" = 1'

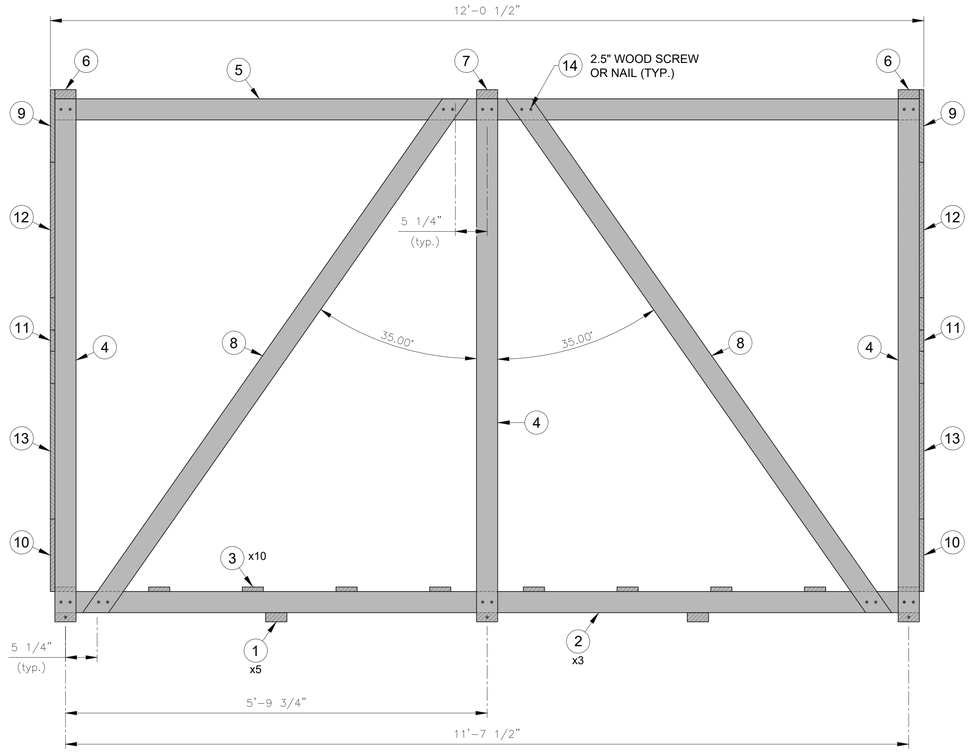

SIDE VIEW

1" = 1'

PARTS LIST					
ITEM NO.	QUANTITY	DESCRIPTION	MATERIAL	SIZE (EA.)	
1	5	BEAM GROUND SUPPORT	PINE	2 x 4 (3' - 7.5")	BASE
2	3	SUPPORT RAIL	PINE	2 x 4 (11' - 11")	
3	10	DECK RAIL	PINE	1 x 4 (3' - 7.5")	
4	6	COLUMN	PINE	2 x 4 (7' - 2.5")	FRAME
5	2	SUPPORT RAIL	PINE	2 x 4 (11' - 11")	
6	2	BEAM END	PINE	2 x 4 (3' - 10.5")	
7	1	BEAM CENTER	PINE	2 x 4 (3' - 10.5")	
8	4	CROSS BRACE SIDE	PINE	2 x 4 (8' - 10.125")	SUPPORT BRACING
9	4	CORNER BRACE TOP END	P. BOARD	1' x 1' x 1'- 5" (.75" THK.)	
10	4	CORNER BRACE BOTTOM END	P. BOARD	1' x 1' x 1'- 5" (.75" THK.)	
11	2	BEAM CENTER END	PINE	1 x 4 (3' - 10.5")	
12	2	CROSS BRACE TOP END	PINE	1 x 4 (4' - 4.625")	
13	2	CROSS BRACE BOTTOM END	PINE	1 x 4 (4' - 4.625")	
14	250	WOOD SCREWS OR NAILS	-	2.5 - INCH	MISC.

NOTE

1. THE OUTER PERIMETERS OF THE CRATE (SIDES & ENDS) SHALL BE SECURELY WRAPPED WITH PLASTIC WRAPPING PRIOR TO BEING TRANSPORTED.

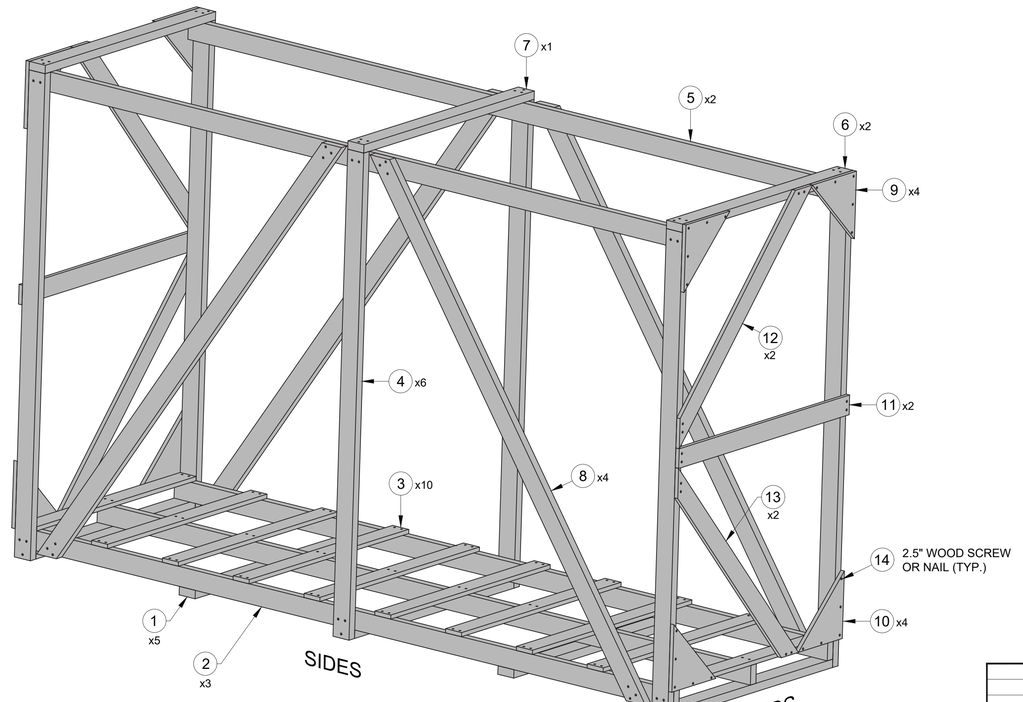

ISOMETRIC OVERVIEW

N.T.S.

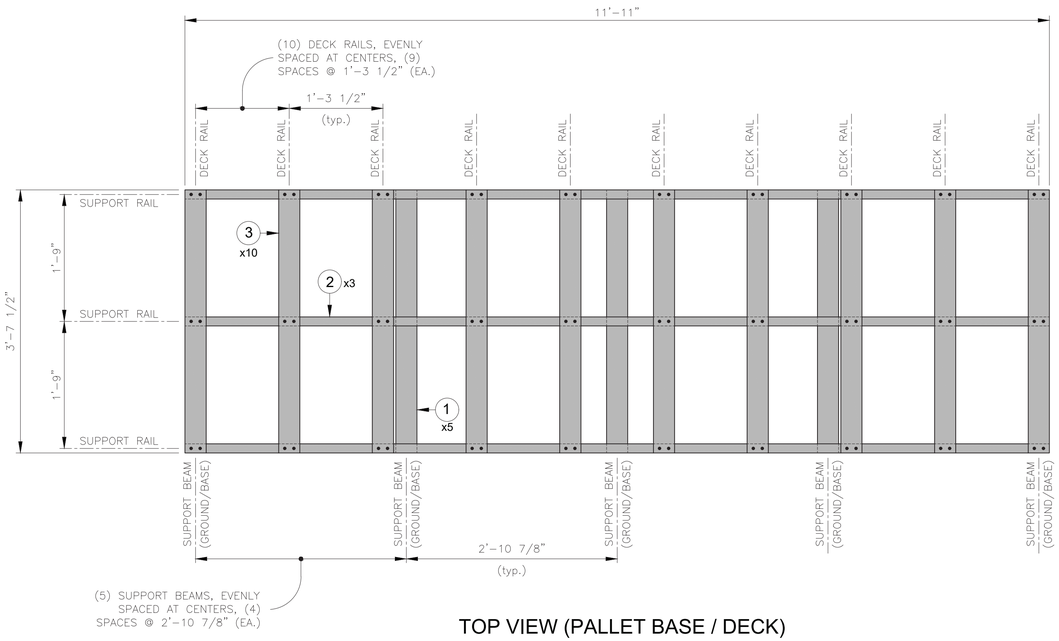

TOP VIEW (PALLET BASE / DECK)

1" = 1'

CONTROL NUMBER: 310040

REV NO.	DRWN BY	DATE	DESCRIPTION	APPR BY
0	DLC	05 / 04 / 26	CREATED SHOP DRAWINGS for BAG CAGE SHIPPING CRATE (TAKEN FROM FIELD MEASUREMENTS)	JDT

UNIT 1 & 2 - BAG CAGE SHIPPING CRATE ASSEMBLY & OVERVIEW DRAWING

JEA Building Community

NORTHSIDE GENERATING STATION

UNIT: N01 & N02
SCALE: AS NOTED (24 x36)
SHEET No: 1 of 1
DWG. NO: NGS_BCSC_M1

Dwg File Path: X:\NGS\DRAWINGS\PLANT DRAWINGS\310000\310040.DWG Tab: UNITS 1 & 2 BAG CAGE CRATE Plotted: By COOK, DONNIE L. on 05/04/2026 - 09:46 Last Saved By: COOK, DONNIE L. on 05/04/2026-09:43